

## GENPOWER GP400


Generator Set Model:	GP400
Standby Power:	400 Kw (500 Kva)
Prime Power:	364 Kw (455 Kva)
Voltage:	440/220 V
Frequency:	60 Hz



www.genpowerusa.com

### STANDARD FEATURES:

- >Deepsea Digital Control Panel
- >Kim Hotstart Heater & Thermostat
- >Battery Rack and Cables
- >Electronic Governor
- >Electronic Battery Charger
- >Industrial Silencer
- >Dry Type Air Filters
- >Anti Skid and Vibration Isolators
- >User Manual

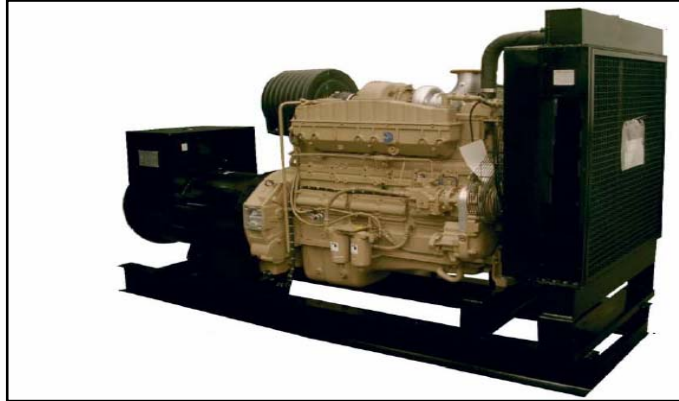

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications

ESP : The standby power rating is applicable for supplying emergency power in variable load applications

### Technical Data

Engine:	Cummins NTA855G5
Alternator:	Stamford HCI434F
Gross Engine Power Output:	605 BHP at 1800 rpm
No. Of Cylinders/Alignment:	6 in Line
Bore x Stroke:	140 x 152 mm
Displacement:	14 Lts
Piston Speed:	9,1 m / sec
Compression Ratio:	14.0:1
Fuel Consumption:	27,2 Gal / Hrs
Aspiration:	Turbocharged and Aftercooled
Electrical System:	24V
Oil Total System Capacity	36,7 Lts
Electric Governor:	Electronic
Water Preheater:	1000 Watts

### Dimensions and Weights

Approx. Dry Weight:	2964 Kgs
Approx. Wet Weight:	3085 Kgs
Dimensions:	(L) 3,15mts x (W) 1,14mts x (H) 1,84mts



## GP400 GenSet 400 kw (500 kva)

### GENERAL POWER LIMITED, INC

8235 NW 64 Street Suite 2

Miami, Florida 33166

Tel 305 471 9566 Fax 305 471 9568

www.genpowerusa.com / info@genpowerusa.com

